

Multi Layer Ceramic Capacitors

Introduction

SAMWHA's series of multilayer ceramic(MLC) chip capacitors is designed to meet a wide variety of need. Multilayer ceramic chip capacitors are available in both class I and class II formulations. Temperature compensation formulations are class I and temperature stable and general application formulations are classified at class II. The class I multilayer ceramic capacitors are COG with negligible dependence of electrical properties on temperature, voltage, frequency. The most of commonly used class II dielectric are X7R, X5R and Y5V. The X7R provides intermediate capacitance values which vary $\pm 15\%$ over the temperature range of -55°C to 125°C . The X5R provides intermediate capacitance values which vary $\pm 15\%$ over the temperature range of -55°C to 85°C . The Y5V provides the highest capacitance value which vary from 22% to -82% over the temperature range of -30°C to 85°C . All class II capacitors vary in capacitance value under the influence of temperature, operating voltage and frequency. We offer a complete line of products for both class I and II.

Features

- Samwha's high density ceramic bodies offer superior performance and reliability
- Samwha offer various temperature characteristics, rated voltage and packing method
- Material with high dielectric constant and superior manufacturing technology allows very high values in a small size
- Solder coated terminals offer superior solderability


Applications

Wide applications throughout commercial and industrial market.

- Communication products like Cellular Phone, Pager, Codeless phone
- Multimedia products like DVD, CD-ROM, FDD, HDD, Game machine, Computer, Note book, Digital camera, LCD
- Audio visual products like TV, Camcorder, Minidisk, MP3 Player
- Communication products like Electronic tuner, Duplexer, VCXO, TCXO, Modem
- OA equipment products like Printer, Copy Machine, Fax Machine

SMD Type

Shape & Dimensions

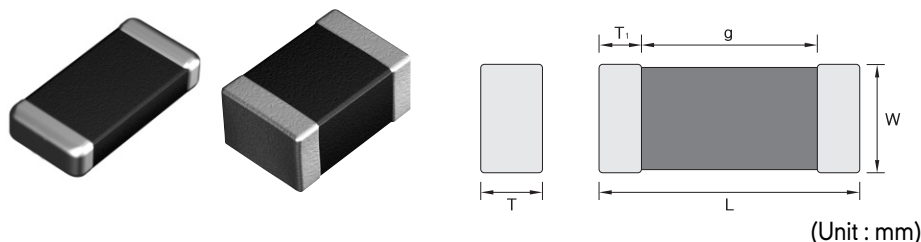

Code(inch)	Dimensions				
	Length		Width		T1(min)
	L	Tol(±)	W	Tol(±)	
0603(0201)	0.60	0.03	0.30	0.03	0.05
1005(0402)	1.00	0.05	0.50	0.05	0.05
1608(0603)	1.60	0.15	0.80	0.10	0.10
2012(0805)	2.00	0.20	1.25	0.15	0.10
3216(1206)	3.20	0.30	1.60	0.20	0.15
3225(1210)	3.20	0.40	2.50	0.25	0.15
4520(1808)	4.50	0.40	2.00	0.25	0.20
4532(1812)	4.50	0.40	3.20	0.30	0.20
5750(2300)	5.70	0.50	5.00	0.40	0.30

*1608 Size $\geq 10\mu\text{F} \Rightarrow W : 0.8 \pm 0.15, T : 0.8 \pm 0.15$

How to Order(Product Identification)

CS 1608 X7R 104 K 160 N R B

1 2 3 4 5 6 7 8 9

1 Type

CS : SMD

SA : ARRAY

2 Size Code

This is expressed in tens of a millimeter.

The first two digits are the length, the last two digits are width.

Size(mm)	0603	1005	1608	2012	3216	3225	4520	4532	5750
----------	------	------	------	------	------	------	------	------	------

3 Temperature Coefficient Code

Temperature Characteristic	Temperature Range	Capacitance Change or Temperature Coefficient	Operating Temperature Range
C0G	-55 to 125°C	$0 \pm 30\text{ppm}/^\circ\text{C}$	-55 to 125°C
X7R	-55 to 125°C	$\pm 15\%$	-55 to 125°C
X5R	-55 to 85°C	$\pm 15\%$	-55 to 85°C
Y5V	-30 to 85°C	+22, -82%	-30 to 85°C

4 Capacitance Code(Pico Farads)

The nominal capacitance value in pF is expressed by three digit numbers.

The first two digits represents significant figures and the last digit denotes the number of zero

Ex.) 104 = 100000pF R denotes decimal 8R2 = 8.2pF

5 Capacitance Tolerance Code

Code	Tolerance	Code	Tolerance
B	$\pm 0.1\text{pF}$	M	$\pm 20\%$
C	$\pm 0.25\text{pF}$	P	+100, -0%
D	$\pm 0.5\text{pF}$	Z	+80, -20%
F	$\pm 1.0\%$	H	+0.25/-0pF
G	$\pm 2.0\%$	I	+0/-0.25pF
J	$\pm 5\%$	U	+5/-0%
K	$\pm 10\%$	V	+0/-5%

6 Voltage Code

Code	6R3	100	160	250	500	101	201	251	631	302
Vol.	DC 6.3V	DC 10V	DC 16V	DC 25V	DC 50V	DC 100V	DC 200V	DC 250V	DC 630V	DC 3000V

7 Termination Code

Ex.) N : Ni-Sn (Nickel-Tin Plate)

8 Packing Code

Ex.) R : Reel Type B : Bulk Type

9 Thickness Option

(Unit : mm)

Code	Thickness(mm)	Dimensions	Code	Thickness(mm)	Dimensions
	L	Tol($\pm$)		W	Tol($\pm$)
Blank	0.30	0.03	E	1.30	0.20
Blank	0.50	0.05	H	1.35	0.20
A	0.60	0.10	I	1.60	0.20
B	0.80	0.10	J	1.80	0.20
B	0.85	0.15	K	2.00	0.25
E	1.00	0.15	L	2.50	0.25
E	1.10	0.15	M	2.80	0.30
E	1.15	0.15	N	3.20	0.30
E	1.25	0.15	O	5.00	0.40

Typical Performance Characteristics


COG

Application

Suited for precision circuits, requiring stable dielectric characteristics, negligible dependence of capacitance and dissipation factor on time, voltage and frequency.

Dielectric Characteristics

Temperature Characteristic	$0 \pm 30 \text{ ppm}/^\circ\text{C}$
Operating Temperature	$-55 \sim 125^\circ\text{C}$
Capacitance Tolerance	$> 10 \text{ pF} : \pm 5\%, \pm 10\%, (\pm 1\%, \pm 2\%, \pm 20\%)$ $\leq 10 \text{ pF} : \pm 0.1 \text{ pF}, \pm 0.25 \text{ pF}, \pm 0.5 \text{ pF}$
Dissipation Factor & Q	$\geq 30 \text{ pF} : \text{DF} \leq 0.1\%, Q \geq 1000$ $< 30 \text{ pF} : Q \geq 400 + 20 \times C$
Insulation Resistance	More than $10,000 \text{ M}\Omega$ or $500 \text{ }\Omega\text{F}$ (Whichever is smaller)
Dielectric Strength	$> 3 \times \text{RVDC}$
Test Voltage	$0.5 \text{ to } 5 \text{ Vrms} (\leq 1000 \text{ pF}), 1 \pm 0.2 \text{ Vrms} (> 1000 \text{ pF})$
Test Frequency	$1 \pm 0.1 \text{ MHz} (\leq 1000 \text{ pF}), 1 \pm 0.1 \text{ kHz} (> 1000 \text{ pF})$

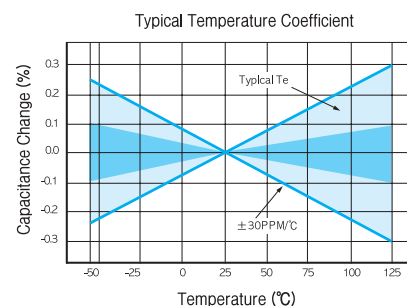


X7R

Application

Stable class II dielectric properties, suited for by-pass and coupling purposes, filtering, frequency discrimination, DC blockage, and as voltage transient suppression elements.

Dielectric Characteristics

Temperature Characteristic	$\pm 15\%$
Operating Temperature	$-55 \sim 125^\circ\text{C}$
Capacitance Tolerance	$\pm 10\%, \pm 20\%, (\pm 5\%, +80 \sim -20\%)$
Dissipation Factor & Q	$50 \text{ V Min.} : 2.5\% \text{ Max.}$ $25 \text{ V Min.} : 3.0\% \text{ Max.}$ $16 \text{ V Min.} : 3.5\% \text{ Max.}$ $10 \text{ V Min.} : 5.0\% \text{ Max.}$ $6.3 \text{ V Min.} : 5.0\% \text{ Max.} (< 3.3 \mu\text{F}), 10\% \text{ Max.} (\geq 3.3 \mu\text{F})$ Thin layer large capacitors type 10% Max.
Insulation Resistance	More than $10,000 \text{ M}\Omega$ or $500 \text{ }\Omega\text{F}$ (Whichever is smaller) Thin layer large capacitors type $50 \text{ }\Omega\text{F Min.}$
Dielectric Strength	$> 2.5 \times \text{RVDC}$
Test Voltage	$1 \pm 0.2 \text{ Vrms} (\leq 10 \mu\text{F}, 10 \text{ V Min.})$ $0.5 \pm 0.1 \text{ Vrms} (\leq 10 \mu\text{F}, 6.3 \text{ V Max.})$ $0.5 \pm 0.1 \text{ Vrms} (> 10 \mu\text{F})$
Test Frequency	$1 \pm 0.1 \text{ kHz} (\leq 10 \mu\text{F}, 10 \text{ V Min.})$ $1 \pm 0.1 \text{ kHz} (\leq 10 \mu\text{F}, 6.3 \text{ V Max.})$ $120 \pm 24 \text{ Hz} (> 10 \mu\text{F})$

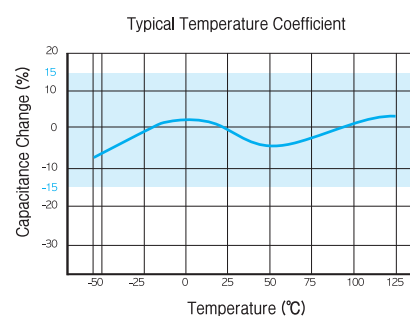


X5R

Application

Stable class II dielectric properties, suited for by-pass and coupling purposes, filtering, frequency discrimination, DC blockage, and as voltage transient suppression elements.

Dielectric Characteristics

Temperature Characteristic	$\pm 15\%$
Operating Temperature	$-55\sim 85^{\circ}\text{C}$
Capacitance Tolerance	$\pm 10\%$, $\pm 20\%$, ($\pm 5\%$, $+80\sim -20\%$)
Dissipation Factor & Q	50V Min. : 2.5% Max. 25V Min. : 3.0% Max. 16V Min. : 3.5% Max. 10V Min. : 5.0% Max. 6.3V Min. : 5.0% Max. ($<3.3\mu\text{F}$), 10% Max. ($\geq 3.3\mu\text{F}$) Thin layer large capacitors type 10% Max.
Insulation Resistance	More than 10,000M Ω or 500 ΩF (Whichever is smaller) Thin layer large capacitors type 50 ΩF Min.
Dielectric Strength	$>2.5 \times \text{RVDC}$
Test Voltage	$1 \pm 0.2\text{Vrms} (\leq 10\mu\text{F}, 10\text{V Min.})$ $0.5 \pm 0.1\text{Vrms} (\leq 10\mu\text{F}, 6.3\text{V Max.})$ $0.5 \pm 0.1\text{Vrms} (>10\mu\text{F})$
Test Frequency	$1 \pm 0.1\text{kHz} (\leq 10\mu\text{F}, 10\text{V Min.})$ $1 \pm 0.1\text{kHz} (\leq 10\mu\text{F}, 6.3\text{V Max.}), 120 \pm 24\text{Hz} (>10\mu\text{F})$

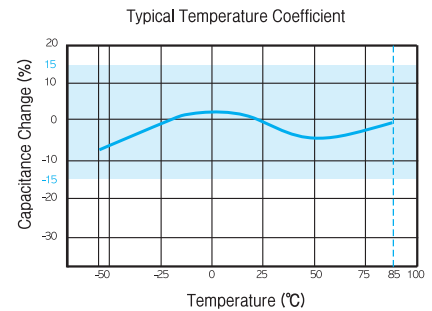


Y5V

Application

The Hi-K(Y5V) dielectrics deliver high capacitance density and are ideally suited for applications where space is at a premium, or as replacement for tantalum capacitors. Typically applications include use as by-pass or decoupling elements. Best performance is obtained at or near room temperature, with low DC bias.

Dielectric Characteristics

Temperature Characteristic	$+22\% \sim -82\%$
Operating Temperature	$-30\sim 85^{\circ}\text{C}$
Capacitance Tolerance	$-20 \sim +80\%$ ($\pm 20\%$)
Dissipation Factor & Q	50V Min. : 5% Max. 25V Min. : 7% Max. 16V Min. : 9% Max. 10V Min. : 12.5% Max. 6.3V Min. : 15% Max. Thin layer large capacitors type 20% Max.
Insulation Resistance	More than 10,000M Ω or 500 ΩF (Whichever is smaller) Thin layer large capacitors type 50 ΩF Min.
Dielectric Strength	$>2.5 \times \text{RVDC}$
Test Voltage	$1 \pm 0.2\text{Vrms} (\leq 10\mu\text{F}, 10\text{V Min.})$ $0.5 \pm 0.1\text{Vrms} (\leq 10\mu\text{F}, 6.3\text{V Max.})$ $0.5 \pm 0.1\text{Vrms} (>10\mu\text{F})$
Test Frequency	$1 \pm 0.1\text{kHz} (\leq 10\mu\text{F}, 10\text{V Min.})$ $1 \pm 0.1\text{kHz} (\leq 10\mu\text{F}, 6.3\text{V Max.}), 120 \pm 24\text{Hz} (>10\mu\text{F})$

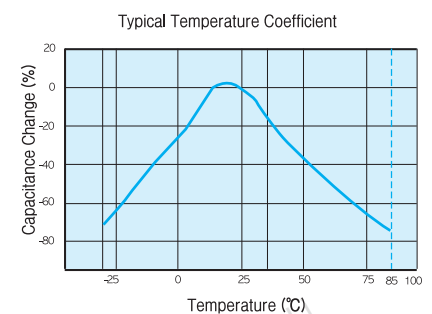

Appendix I

C0G-Temperature Compensating Type(0603~3216)

Type	C0G								
Size(inch)	0603(0201)	1005(0402)		1608(0603)		2012(0805)		3216(1206)	
Volt(V)	25	25	50	25	50	25	50	25	50
Cap.									
0.5pF(0R5)									
1pF(010)									
2pF(020)									
3pF(030)									
4pF(040)									
5pF(050)									
6pF(060)									
7pF(070)									
8pF(080)									
9pF(090)									
10pF(100)									
12pF(120)									
15pF(150)									
18pF(180)									
22pF(220)									
27pF(270)									
33pF(330)									
39pF(390)									
47pF(470)									
56pF(560)									
68pF(680)									
82pF(820)									
100pF(101)									
120pF(121)									
150pF(151)									
180pF(181)									
220pF(221)									
270pF(271)									
330pF(331)									
390pF(391)									
470pF(471)									
560pF(561)									
680pF(681)									
820pF(821)									
1000pF(102)									
1200pF(122)									
1500pF(152)									
1800pF(182)									
2200pF(222)									
2700pF(272)									
3300pF(332)									
3900pF(392)									
4700pF(472)									
5600pF(562)									
6800pF(682)									
8200pF(822)									
10000pF(103)									
12000pF(123)									
15000pF(153)									
18000pF(183)									
22000pF(223)									
27000pF(273)									
33000pF(333)									
47000pF(473)									
56000pF(563)									
68000pF(683)									
82000pF(823)									
0.1μF(104)									

Appendix II

X7R-High Dielectric Constant Type(0603~3225) & Thin Layer Large-Capacitance Type

Type	X7R																								
Size(inch)	0603(0201)					1005(0402)					1608(0603)					2012(0805)					3216(1206)				
Volt(V)	6.3	10	16	25		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
Cap.	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
100pF(101)																									
470pF(471)																									
1000pF(102)																									
2200pF(222)																									
4700pF(472)																									
10000pF(103)																									
15000pF(153)																									
22000pF(223)																									
33000pF(333)																									
47000pF(473)																									
68000pF(683)																									
0.1μF(104)																									
0.15μF(154)																									
0.22μF(224)																									
0.33μF(334)																									
0.47μF(474)																									
0.68μF(684)																									
1.0μF(105)																									
1.5μF(155)																									
2.2μF(225)																									
4.7μF(475)																									
6.8μF(685)																									
10μF(106)																									
22μF(226)																									
47μF(476)																									
100μF(107)																									

General Type : Dissipation Factor Page 22 (No.5)

* General Type : Dissipation Factor Page 22 (No.5)

Thin Layer Large-Capacitance Type : Dissipation Factor Page 22 (No.5)

X5R-High Dielectric Constant Type(0603~3225) & Thin Layer Large-Capacitance Type

Type	X5R																								
Size(inch)	0603(0201)					1005(0402)					1608(0603)					2012(0805)					32169(1206)				
Volt(V)	6.3	10	16	25		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
Cap.	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
100 pF (101)																									
470 pF (471)																									
1000 pF (102)																									
2200 pF (222)																									
4700 pF (472)																									
10000 pF (103)																									
15000 pF (153)																									
22000 pF (223)																									
33000 pF (333)																									
47000 pF (473)																									
68000 pF (683)																									
0.1 μ F (104)																									
0.15 μ F (154)																									
0.22 μ F (224)																									
0.33 μ F (334)																									
0.47 μ F (474)																									
0.68 μ F (684)																									
1.0 μ F (105)																									
1.5 μ F (155)																									
2.2 μ F (225)																									
4.7 μ F (475)																									
6.8 μ F (685)																									
10 μ F (106)																									
22 μ F (226)																									
47 μ F (476)																									
100 μ F (107)																									

General Type : Dissipation Factor Page 22 (No.5)

* General Type : Dissipation Factor Page 22 (No.5)

Thin Layer Large-Capacitance Type : Dissipation Factor Page 22 (No.5)

Y5V-High Dielectric Constant Type(0603~3225) & Thin Layer Large-Capacitance Type

Type	Y5V																								
Size(inch)	1005(0402)					1608(0603)					2012(0805)					3216(1206)					3225(1210)				
Volt(V)	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
Cap.	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
1000pF(102)																									
2200pF(222)																									
4700pF(472)																									
10000pF(103)																									
15000pF(153)																									
22000pF(223)																									
33000pF(333)																									
47000pF(473)																									
68000pF(683)																									
0.1μF(104)																									
0.15μF(154)																									
0.22μF(224)																									
0.33μF(334)																									
0.47μF(474)																									
0.68μF(684)																									
1.0μF(105)																									
1.5μF(155)																									
2.2μF(225)																									
3.3μF(335)																									
4.7μF(475)																									
6.8μF(685)																									
10μF(106)																									
22μF(226)																									
47μF(476)																									
100μF(107)																									

General Type : Dissipation Factor Page 22 (No.5)

* General Type : Dissipation Factor Page 22 (No.5)

Thin Layer Large-Capacitance Type : Dissipation Factor Page 22 (No.5)

SMD Type-High Voltage

Product Offering

SAMWHA high voltage MLCC products with COG(NPO) and X7R temperature characteristic are designed for commercial and industrial applications.

The products are power supply and voltage multiplier circuits applications in various sizes with working voltages up to DC 3.0 KV .

These high voltage capacitors feature a special internal electrode design which reduces voltage concentrations by distributing voltage gradients throughout the entire capacitor.

This unique design also affords that capacitance value is increased in a given case size and voltage rating.

Features

- High reliability
- High voltage ratings
- Wide voltage level : from 100V to 3000V
- Surface mount suited for Wave and Reflow Soldering
- Tape & reel surface mount assembly
- Suitable for Back-Lighting Inverter, DC-DC Converters, Ballast, Modems & Power Supply, LAN/WLAN interface... etc.

How to Order(Product Identification)

CS 4520 COG 150 J 302 N R E

1 2 3 4 5 6 7 8 9

1 Type

CS : SMD

2 Size Code

Size(mm)	1608	2012	3216	3225	4520	4532
----------	------	------	------	------	------	------

3 Dielectric (Temp. Coefficient)

COG, X7R

4 Capacitance

1st two digits are value, 3rd digit denotes number of zeros;

331 = 330pF, 104 = 100000pF, 8R2C = 8.2pF

5 Tolerance

Code	Tolerance	Code	Tolerance
B	$\pm 0.1\text{pF}$	C	$\pm 0.25\text{pF}$
D	$\pm 0.50\text{pF}$	F	$\pm 1\%$
G	$\pm 2\%$	J	$\pm 5\%$
K	$\pm 10\%$	M	$\pm 20\%$
Z	$+80\sim-20\%$		

6 Rated Voltage Code

1st two digits are value, 3rd digit denotes number of zeros; 302 = 3000V, 251 = 250V

7 Plating

Ni / Sn Plated

8 Packing


B : Bulk Pack R : Reel Pack

9 Thickness Option

(Unit : mm)

Code	Thickness(mm)	Dimensions	Code	Thickness(mm)	Dimensions
	L	Tol($\pm$)		W	Tol($\pm$)
Blank	0.30	0.03	E	1.30	0.20
Blank	0.50	0.05	H	1.35	0.20
A	0.60	0.10	I	1.60	0.20
B	0.80	0.10	J	1.80	0.20
B	0.85	0.15	K	2.00	0.25
E	1.00	0.15	L	2.50	0.25
E	1.10	0.15	M	2.80	0.30
E	1.15	0.15	N	3.20	0.30
E	1.25	0.15	O	5.00	0.40

Shape & Dimensions

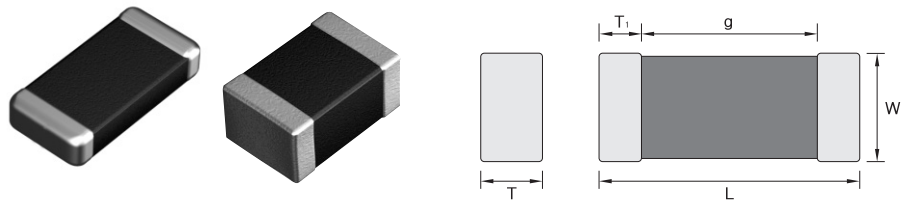

(Unit : mm)

Code	Dimensions				
	Length		Width		T1(min)
	L	Tol(±)	W	Tol(±)	
1608(0603)	1.60	0.15	0.80	0.10	0.10
2012(0805)	2.00	0.20	1.25	0.15	0.10
3216(1206)	3.20	0.30	1.60	0.20	0.15
3225(1210)	3.20	0.40	2.50	0.25	0.15
4520(1808)	4.50	0.40	2.00	0.25	0.20
4532(1812)	4.50	0.40	3.20	0.30	0.20
5750(2300)	5.70	0.50	5.00	0.40	0.30

*1608 Size $\geq 10\mu\text{F} \Rightarrow W : 0.8 \pm 0.15, T : 0.8 \pm 0.15$

Typical Performance Characteristics

	COG(NPO)	X7R
Dielectric Characteristics		
Dielectric Classification	Ultra Stable	Stable
Rated temperature range	-55°C to +125°C	-55°C to +125°C
TCC(Temperature Characteristics Coefficient)	0±30ppm	±15%
Dissipation Factor(tan δ)	C≥30pF : Q≥1,000 (DF:≤ 0.1%) C<30pF : Q≥400+20C(DF: ≤1/(400+20C))	2.5% Max.
IR(Insulation Resistance)	500V Below : Rated voltage 60sec 500V Above : 500V 60sec More than 10,000 MΩ	500V Below:Rated voltage 60sec 500V Above:500V 60sec -DC100V~1KV :C≥0.01μF:More than 100MΩμF :C<0.01μF:More than 10,000MΩ -DC2~3KV:More than6,000 MΩ
Capacitance Tolerance	<10pF : ±0.25pF, ±0.5pF ≥10pF : ±5%, ±0%	±10%, ±20%
Dielectric strength	630V:150% Rated Voltage 1kV~3.15kV:120% Rated Voltage	100V:150% Rated Voltage 630V:150% Rated Voltage 1kV~3.15kV: 120% Rated Voltage
Aging characteristics	0%	2.5% per decade hr, typical

Appendix High Voltage Type(100V~3000V)

COG-Temperature Compensation Type

Type	COG																									
Size(inch)	1608(0603)		2012(0805)		3216(1206)					3225(1210)					4520(1808)						4532(1812)					
Volt(V) Cap.	100	250	100	250	100	250	630	1000	2000	100	250	630	1000	2000	100	250	630	1000	2000	3000	100	250	630	1000	2000	3000
4.7 pF(4R7)																										
5 pF(050)																										
7 pF(070)																										
8 pF(080)																										
9 pF(090)																										
10 pF(100)																										
12 pF(120)																										
15 pF(150)																										
18 pF(180)																										
22 pF(220)																										
47 pF(470)																										
56 pF(560)																										
68 pF(680)																										
82 pF(820)																										
100 pF(101)																										
220 pF(221)																										
330 pF(331)																										
470 pF(471)																										
560 pF(561)																										
680 pF(681)																										
1000 pF(102)																										
1500 pF(152)																										
2200 pF(222)																										
2700 pF(272)																										
3300 pF(332)																										
4700 pF(472)																										
5600 pF(562)																										
6800 pF(682)																										
10000 pF(103)																										
15000 pF(153)																										
22000 pF(223)																										
33000 pF(333)																										

High voltage type

X7R-High Dielectric Type

Type	X7R																													
Size(inch)	1608(0603)				2012(0805)				3216(1206)					3225(1210)					4520(1808)						4532(1812)					
Volt(V) Cap.	100	250	100	250	100	250	630	1000	2000	100	250	630	1000	2000	100	250	630	1000	2000	3000	100	250	630	1000	2000	3000				
220pF(221)																														
330pF(331)																														
470pF(471)																														
680pF(681)																														
1000pF(102)																														
1500pF(152)																														
2200pF(222)																														
3300pF(332)																														
4700pF(472)																														
5600pF(562)																														
6800pF(682)																														
10000pF(103)																														
15000pF(153)																														
18000pF(183)																														
22000pF(223)																														
33000pF(333)																														
47000pF(473)																														
68000pF(683)																														
0.1μF(104)																														
0.15μF(154)																														
0.22μF(224)																														
0.33μF(334)																														
0.47μF(474)																														
0.68μF(684)																														
1.0μF(105)																														
2.2μF(225)																														






High voltage type

Caution(Rating)

1. Operating Voltage

When DC-rated capacitors are to be used in AC or ripple current circuits, be sure to maintain the V_{p-p} Value of the applied voltage or the V_{o-p} which contains DC bias within the rated voltage range.

When the voltage is applied to the circuit, starting or stopping may generate irregular voltage for a transit period because of resonance or switching. Be sure to use a capacitor with a rated voltage range that includes these irregular voltages.

Voltage	DV Voltage	DC+AC Voltage	AC Voltage	Pulse Voltage(1)	Pulse Voltage(2)
Positional Measurement					


2. Test condition for AC withstanding Voltage

(1) Test Equipment

Tests for AC withstanding voltage should be made with equipment capable of creating a wave similar to a 50/60 Hz sine wave. If the distorted sine wave or overload exceeding the specified voltage value is applied, a defect may be caused.

(2) Voltage applied method

The capacitor's leads or terminals should be firmly connected to the output of the withstanding voltage test equipment, and then the voltage should be raised from near zero to the test voltage. If the test voltage is applied directly to the capacitor without raising it from near zero, it should be applied with the ***zero cross**. At the end of the test time, the test voltage should be reduced to near zero, and then the capacitor's leads or terminals should be taken off the output of the withstanding voltage test equipment. If the test voltage is applied directly to the capacitor without raising it from near zero, surge voltage may occur and cause a defect. ***ZERO CROSS** is the point where voltage sine wave



(3) Dielectric strength testing method

In case of dielectric strength test, the capacitor's is applied between the terminations for 1 to 5 sec., provided the charge/discharge current is less than 50mA.

3. Soldering

If a chip component is heated or cooled abruptly during soldering, it may crack due to the thermal shock. To prevent this, follow our recommendations below for adequate soldering conditions. Carefully perform preheating so that temperature difference (ΔT) between the solder and component surface is in the following range. The smaller the temperatures difference (ΔT) between the solder and component surface is, the smaller the influence on the chip is.

Chip Size Slodering Method	3.2×1.6mm and under	3.2×2.5mm and over
Reflow Method or Soldering Iron Method	$\Delta T \leq 190^{\circ}\text{C}$	$\Delta T \leq 130^{\circ}\text{C}$

SAMWHA CAPACITOR CO., LTD offers a line of MLCC(Multilayer Ceramic Capacitor). These parts are rated at 3kV dc and safety approved and certified to UL (Underwriters Laboratories Inc. ®)


ONLINE CERTIFICATIONS DIRECTORY

[OCD Home](#)
[Quick Guide](#)
[Contact Us](#)
[UL.com](#)

NWQG8.E304146

Information Technology Equipment Including Electrical Business Equipment Certified for Canada - Component

[Page Bottom](#)

Information Technology Equipment Including Electrical Business Equipment Certified for Canada - Component

[See General Information for Information Technology Equipment Including Electrical Business Equipment Certified for Canada - Component](#)

SAMWHA CAPACITOR CO LTD 124 BUK-RI NAMSA-MYEUN YONGIN-SHI, KYONGGI-DO 449-880 REPUBLIC OF KOREA	E304146
---	----------------

Component Recognition, Model(s) CS45XXYYTTTA302NRE.



Marking: Company name, model designation and Recognized Component Mark for Canada, .

[Last Updated](#) on 2006-04-28

[Questions?](#)
[Notice of Disclaimer](#)
[Page Top](#)

[Copyright © 2006 Underwriters Laboratories Inc.®](#)


The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright © 2006 Underwriters Laboratories Inc.®"

Reliability and Test Conditions(General Type)

No.	Item	Characteristic		Test Methods and Conditions																																													
		Temperature Compensating Type	High Dielectric Constant Type																																														
1	Operating Temperature Range	C0G : -55 to +125℃	X7R : -55 to +125℃ X5R : -55 to +85℃ Y5V : -30 to +85℃																																														
2	Insulation Resistance	More than 10,000MΩ or 500ΩF (Whichever is smaller)		- Applied the rated voltage for 2 minutes of charging. - The charge/discharge current is less than 50mA.																																													
3	Dielectric Strength	No defects or abnormalities		- C0G : The rated voltage × 300% - X7R, X5R, Y5V : " × 250% - Applied between the terminations for 1 to 5 seconds. - The charge/discharge current is less than 50mA.																																													
4	Capacitance	Within the specified tolerance																																															
5	Dissipation Factor	30pF Min. : Q≥1,000 (DF≤0.1%) 30pF Max. : Q≥400+20C (DF≤1/(400+20C))	<table><tr><th>Char.</th><th>50V Min.</th><th>25V</th><th>16V</th><th>10V</th><th>6.3V</th></tr><tr><td>X7R</td><td>≤2.5%/</td><td>≤3%/</td><td>≤3.5%/</td><td>≤5%/</td><td>≤5%/</td></tr><tr><td>X5R</td><td>* ≤5%</td><td>* ≤7%</td><td>* ≤7%</td><td>* ≤10%</td><td>* ≤10%</td></tr><tr><td>Y5V</td><td>≤5%/</td><td>≤7%/</td><td>≤9%</td><td>≤12.5%/</td><td>≤15%</td></tr><tr><td></td><td>* ≤9%</td><td>* ≤9%</td><td>* ≤12.5%</td><td>* ≤15%</td><td></td></tr></table>	Char.	50V Min.	25V	16V	10V	6.3V	X7R	≤2.5%/	≤3%/	≤3.5%/	≤5%/	≤5%/	X5R	* ≤5%	* ≤7%	* ≤7%	* ≤10%	* ≤10%	Y5V	≤5%/	≤7%/	≤9%	≤12.5%/	≤15%		* ≤9%	* ≤9%	* ≤12.5%	* ≤15%		The capacitance/Q/D.F. should be measured at 25℃ at the frequency and voltage shown in the table. <table><tr><th>Cap.</th><th>Testing Frequency</th><th>Testing Voltage</th></tr><tr><td>C0G (C≤1000pF)</td><td>1±0.1MHz</td><td>0.5 to 5Vrms</td></tr><tr><td>C0G (C>1000pF)</td><td>1±0.1kHz</td><td>1±0.2Vrms</td></tr><tr><td>X7R, X5R, Y5V (C≤10μF 6.3V Min.)</td><td>1±0.1kHz</td><td>1±0.2Vrms</td></tr><tr><td>X7R, X5R, Y5V (C>10μF)</td><td>120±24Hz</td><td>0.5±0.1Vrms</td></tr></table>	Cap.	Testing Frequency	Testing Voltage	C0G (C≤1000pF)	1±0.1MHz	0.5 to 5Vrms	C0G (C>1000pF)	1±0.1kHz	1±0.2Vrms	X7R, X5R, Y5V (C≤10μF 6.3V Min.)	1±0.1kHz	1±0.2Vrms	X7R, X5R, Y5V (C>10μF)	120±24Hz	0.5±0.1Vrms
			Char.	50V Min.	25V	16V	10V	6.3V																																									
			X7R	≤2.5%/	≤3%/	≤3.5%/	≤5%/	≤5%/																																									
X5R	* ≤5%	* ≤7%	* ≤7%	* ≤10%	* ≤10%																																												
Y5V	≤5%/	≤7%/	≤9%	≤12.5%/	≤15%																																												
	* ≤9%	* ≤9%	* ≤12.5%	* ≤15%																																													
Cap.	Testing Frequency	Testing Voltage																																															
C0G (C≤1000pF)	1±0.1MHz	0.5 to 5Vrms																																															
C0G (C>1000pF)	1±0.1kHz	1±0.2Vrms																																															
X7R, X5R, Y5V (C≤10μF 6.3V Min.)	1±0.1kHz	1±0.2Vrms																																															
X7R, X5R, Y5V (C>10μF)	120±24Hz	0.5±0.1Vrms																																															
* You can check the specification at the appendix for each product with mark																																																	
6	Solderability of Termination	Termination should be covered with more than 75% of new solder		- Pb-Free Type Solder : 96.5Sn-3Ag-0.5Cu Solder Temperature : 260±5℃ Immersion Time : 3±0.1sec - Pre-Heating at 80~120℃ for 10~30sec																																													
7	Resistance to Soldering Heat	Appearance	No marked defect		- Preheat the capacitor at 120 to 150℃ for 1 minute. (Preheating for 3225, 4520, 4532 Step1: 100℃ to 120℃, 1min Step2: 170℃ to 200℃, 1min) Immerse the capacitor in a eutectic solder solution - Soldering Temp. : 260±5℃ - Immersion Time : 10±0.5sec - Initial measurement Perform a heat treatment at 150+0, -10℃ for one hour and then let sit for 48±4 hours at room temperature. Perform the intial measurement. - Measurement after test Take it out and set it for 24±2 hours (temperature compensating type) or 48±4 hours (high dielectric constant type)then measure																																												
		Capacitchange	Within ±2.5% or ±0.25pF (whichever is larger)	X7R, X5R : ≤ ±7.5% Y5V : ≤ ±20%																																													
		Dissipation Factor (or Q)	30pF Min. : Q≥1,000 (DF≤0.1%) 30pF Max. : Q≥400+20C (DF≤1/(400+20C))	<table><tr><th>Char.</th><th>50V Min.</th><th>25V</th><th>16V</th><th>10V</th><th>6.3V</th></tr><tr><td>X7R</td><td>≤2.5%/</td><td>≤3%/</td><td>≤3.5%/</td><td>≤5%/</td><td>≤5%/</td></tr><tr><td>X5R</td><td>* ≤5%</td><td>* ≤7%</td><td>* ≤7%</td><td>* ≤10%</td><td>* ≤10%</td></tr><tr><td>Y5V</td><td>≤5%/</td><td>≤7%/</td><td>≤9%</td><td>≤12.5%/</td><td>≤15%</td></tr><tr><td></td><td>* ≤9%</td><td>* ≤9%</td><td>* ≤12.5%</td><td>* ≤15%</td><td></td></tr></table>		Char.	50V Min.	25V	16V	10V	6.3V	X7R	≤2.5%/	≤3%/	≤3.5%/	≤5%/	≤5%/	X5R	* ≤5%	* ≤7%	* ≤7%	* ≤10%	* ≤10%	Y5V	≤5%/	≤7%/	≤9%	≤12.5%/	≤15%		* ≤9%	* ≤9%	* ≤12.5%	* ≤15%															
	Char.	50V Min.	25V	16V		10V	6.3V																																										
X7R	≤2.5%/	≤3%/	≤3.5%/	≤5%/	≤5%/																																												
X5R	* ≤5%	* ≤7%	* ≤7%	* ≤10%	* ≤10%																																												
Y5V	≤5%/	≤7%/	≤9%	≤12.5%/	≤15%																																												
	* ≤9%	* ≤9%	* ≤12.5%	* ≤15%																																													
I.R.	More than 10,000MΩ or 500Ω, F (Whichever is smaller)																																																

No.	Item	Characteristic						Test Methods and Conditions																										
		Temperature Compensating Type	High Dielectric Constant Type																															
8	Temperature Cycle	Appearance	No marking defects						Perform the five cyclless according to the four heat treatments listed in the following table. <table><tr><th>Step</th><th>1</th><th>2</th><th>3</th><th>4</th></tr><tr><td>Temp. (°C)</td><td>Min. Operating Temp. +0, -3</td><td>Room Temp.</td><td>Max. Operating Temp. +3, -0</td><td>Room Temp.</td></tr><tr><td>Time (Min)</td><td>30±3</td><td>2 to 3</td><td>30±3</td><td>2 to 3</td></tr></table> - Initial measurement Perform a heat treatment at 150+0, -10°C for one hour and then let sit for 48±4 hours at room temperature. - Measurement after test Take it out and set it for 24±2 hours (temperature compensating) or 48±4 hours(high dielectric constant type) at room temperature, then measure.	Step	1	2	3	4	Temp. (°C)	Min. Operating Temp. +0, -3	Room Temp.	Max. Operating Temp. +3, -0	Room Temp.	Time (Min)	30±3	2 to 3	30±3	2 to 3										
		Step	1	2	3	4																												
		Temp. (°C)	Min. Operating Temp. +0, -3	Room Temp.	Max. Operating Temp. +3, -0	Room Temp.																												
		Time (Min)	30±3	2 to 3	30±3	2 to 3																												
Capacitance Change	Within ±2.5% or ±0.25pF (whichever is larger)	X7R, X5R : Within ±7.5% Y5V : Within ±20%																																
Dissipation Factor (or Q)	30pF Min. : Q≥1,000 (DF≤0.1%) 30pF Max. : Q≥400+20C (DF≤1/(400+20C))	<table><tr><th>Char.</th><th>50V Min.</th><th>25V</th><th>16V</th><th>10V</th><th>6.3V</th></tr><tr><td>X7R</td><td>≤5%/</td><td>≤5%/</td><td>≤5%/</td><td>≤7.5%/</td><td>≤7.5%/</td></tr><tr><td>X5R</td><td>* ≤7.5%</td><td>* ≤10%</td><td>* ≤10%</td><td>* ≤12.5%</td><td>* ≤12.5%</td></tr><tr><td>Y5V</td><td>≤7.5%/ * ≤12.5%</td><td>≤10%/ * ≤12.5%</td><td>≤12.5% * ≤15%</td><td>≤15%/ * ≤20%</td><td>≤20%</td></tr></table>	Char.	50V Min.	25V	16V	10V	6.3V	X7R	≤5%/	≤5%/	≤5%/	≤7.5%/	≤7.5%/	X5R	* ≤7.5%	* ≤10%	* ≤10%	* ≤12.5%	* ≤12.5%	Y5V	≤7.5%/ * ≤12.5%	≤10%/ * ≤12.5%	≤12.5% * ≤15%	≤15%/ * ≤20%	≤20%								
Char.	50V Min.	25V	16V	10V	6.3V																													
X7R	≤5%/	≤5%/	≤5%/	≤7.5%/	≤7.5%/																													
X5R	* ≤7.5%	* ≤10%	* ≤10%	* ≤12.5%	* ≤12.5%																													
Y5V	≤7.5%/ * ≤12.5%	≤10%/ * ≤12.5%	≤12.5% * ≤15%	≤15%/ * ≤20%	≤20%																													
I.R.	More than 10,000MΩ or 500Ω.F (Whichever is smaller)																																	
9	Humidity Load	Appearance	No marking defects						- Temperature : 40±2°C - Humidity : 90~95% - Hour : 500±12hrs - Test Voltage : The rated voltage - Take it out and set it for 24±2 hours (temperature compensating) or 48±4 hours(high dielectric constant type) at room temperature, then measure. The charge/discharge current is less than 50mA																									
		Capacitance Change	Within ±7.5% or ±0.75pF (whichever is larger)	X7R, X5R : Within ±12.5% Y5V : Within +30%, -40% (Y5V/1.0μF, 2.2μF, 4.7μF/10V) Within ±30% (others)																														
		Dissipation Factor (or Q)	30pF Min. : Q≥200 (DF≤0.5%) 30pF Max. : Q≥100 +10/3C (DF≤1/(100+10/3C))	<table><tr><th>Char.</th><th>50V Min.</th><th>25V</th><th>16V</th><th>10V</th><th>6.3V</th></tr><tr><td>X7R</td><td>≤5%/</td><td>≤5%/</td><td>≤5%/</td><td>≤7.5%/</td><td>≤7.5%/</td></tr><tr><td>X5R</td><td>* ≤7.5%</td><td>* ≤10%</td><td>* ≤10%</td><td>* ≤12.5%</td><td>* ≤12.5%</td></tr><tr><td>Y5V</td><td>≤7.5%/ * ≤12.5%</td><td>≤10%/ * ≤12.5%</td><td>≤12.5% * ≤15%</td><td>≤15%/ * ≤20%</td><td>≤20%</td></tr></table>	Char.	50V Min.	25V	16V		10V	6.3V	X7R	≤5%/	≤5%/	≤5%/	≤7.5%/	≤7.5%/	X5R	* ≤7.5%	* ≤10%	* ≤10%	* ≤12.5%	* ≤12.5%	Y5V	≤7.5%/ * ≤12.5%	≤10%/ * ≤12.5%	≤12.5% * ≤15%	≤15%/ * ≤20%	≤20%					
		Char.	50V Min.	25V	16V	10V	6.3V																											
X7R	≤5%/	≤5%/	≤5%/	≤7.5%/	≤7.5%/																													
X5R	* ≤7.5%	* ≤10%	* ≤10%	* ≤12.5%	* ≤12.5%																													
Y5V	≤7.5%/ * ≤12.5%	≤10%/ * ≤12.5%	≤12.5% * ≤15%	≤15%/ * ≤20%	≤20%																													
I.R.	More than 500MΩ or 25Ω.F (Whichever is smaller)																																	
10	High Temperature Load	Appearance	No marking defects						- Testing time : 1000±12hrs - Applied voltage : Rated voltage < DC250V : ×200% - Temperature : C0G, X7R → 125±3°C X5R, Y5V → 85±3°C - Measurement after test Take it out and set it for 24±2 hours(temperature compensating type)or 48±4 hours (high dielectric constant type) at room temperature, then measure. The charge/discharge current is less than 50mA.																									
		Capacitance Change	Within ±3% or ±0.3pF (whichever is larger)	X7R, X5R : Within ±12.5% Y5V : Within ±30%(Cap. < 1.0μF) Within +30%, -40% (Cap. ≥ 1.0μF)																														
		Dissipation Factor (or Q)	30pF Min. : Q≥350 (DF≤0.3%) 10pF≤Cp ≤30pF : Q≥275 +5/2C (DF≤1/(275+5/2C)) 10pF Max. : Q≥200+10C (DF≤1/(200+10C))	<table><tr><th>Char.</th><th>50V Min.</th><th>25V</th><th>16V</th><th>10V</th><th>6.3V</th></tr><tr><td>X7R</td><td>≤5%/</td><td>≤5%/</td><td>≤5%/</td><td>≤7.5%/</td><td>≤7.5%/</td></tr><tr><td>X5R</td><td>* ≤7.5%</td><td>* ≤10%</td><td>* ≤10%</td><td>* ≤12.5%</td><td>* ≤12.5%</td></tr><tr><td>Y5V</td><td>≤7.5%/ * ≤12.5%</td><td>≤10%/ * ≤12.5%</td><td>≤12.5% * ≤15%</td><td>≤15%/ * ≤20%</td><td>≤20%</td></tr></table>	Char.	50V Min.	25V	16V		10V	6.3V	X7R	≤5%/	≤5%/	≤5%/	≤7.5%/	≤7.5%/	X5R	* ≤7.5%	* ≤10%	* ≤10%	* ≤12.5%	* ≤12.5%	Y5V	≤7.5%/ * ≤12.5%	≤10%/ * ≤12.5%	≤12.5% * ≤15%	≤15%/ * ≤20%	≤20%					
		Char.	50V Min.	25V	16V	10V	6.3V																											
X7R	≤5%/	≤5%/	≤5%/	≤7.5%/	≤7.5%/																													
X5R	* ≤7.5%	* ≤10%	* ≤10%	* ≤12.5%	* ≤12.5%																													
Y5V	≤7.5%/ * ≤12.5%	≤10%/ * ≤12.5%	≤12.5% * ≤15%	≤15%/ * ≤20%	≤20%																													
I.R.	More than 10,000MΩ or 50Ω.F (Whichever & Smaller)																																	

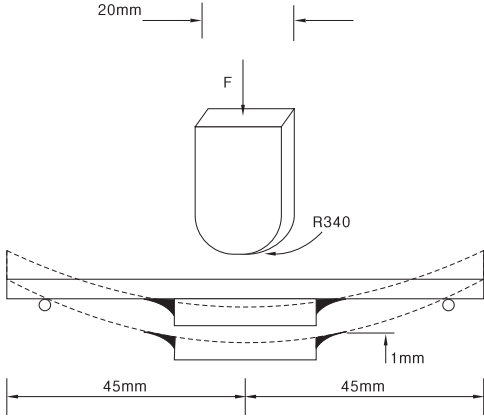No.	Item	Characteristic		Test Methods and Conditions																										
		Temperature Compensating Type	High Dielectric Constant Type																											
11	Bending Strength		 No cracking or marking defects shall occur	- Substrate Material : Glass EPOXY Board - Board Thickness : 1.6mm 0.8mm(0603/1005size) ※ Test Condition - Bending Limit : 1mm - Pressurizing Speed : 1mm/sec																										
		Capacitance Change	Within $\pm 5\%$ or $\pm 0.5\text{pF}$ (whichever is larger) X7R, X5R : Within $\pm 12.5\%$ Y5V : Within $\pm 30\%$																											
12	Vibration Resistance	Appearance	No defects or abnormalities		* Shown in Fig. After soldering and then let sit for 24+4hr(temperature compensating type), $48\pm 4\text{hr}$ (high dielectric constant type) at room temperature. The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz, shall be traversed(from 10Hz to 55Hz then 10Hz again) in approximately 1 minute. This motion shall be applied for a period of 2 hours in each 3mutually perpendicular directions(total is 6hours).																									
		Capacitance	Whin the specified tolerance																											
	Q/DF	30pF Min. : Q 1,000 (DF 0.1%) 30pF Max. : Q 400+20C (DF 1/ (400+20C))	<table><tr><th>Char.</th><th>50V Min.</th><th>25V</th><th>16V</th><th>10V</th><th>6.3V</th></tr><tr><td>X7R</td><td>$\leq 2.5\%$</td><td>$\leq 3\%$</td><td>$\leq 3.5\%$</td><td>$\leq 5\%$</td><td>$\leq 5\%$</td></tr><tr><td>X5R</td><td>* $\leq 5\%$</td><td>* $\leq 7\%$</td><td>* $\leq 7\%$</td><td>* $\leq 10\%$</td><td>* $\leq 10\%$</td></tr><tr><td>Y5V</td><td>$\leq 5\%$ * $\leq 9\%$</td><td>$\leq 7\%$ * $\leq 9\%$</td><td>$\leq 9\%$ * $\leq 12.5\%$</td><td>$\leq 12.5\%$ * $\leq 15\%$</td><td>$\leq 15\%$</td></tr></table>	Char.	50V Min.	25V	16V	10V	6.3V	X7R	$\leq 2.5\%$	$\leq 3\%$	$\leq 3.5\%$	$\leq 5\%$	$\leq 5\%$	X5R	* $\leq 5\%$	* $\leq 7\%$	* $\leq 7\%$	* $\leq 10\%$	* $\leq 10\%$	Y5V	$\leq 5\%$ * $\leq 9\%$	$\leq 7\%$ * $\leq 9\%$	$\leq 9\%$ * $\leq 12.5\%$	$\leq 12.5\%$ * $\leq 15\%$	$\leq 15\%$			
Char.	50V Min.	25V	16V	10V	6.3V																									
X7R	$\leq 2.5\%$	$\leq 3\%$	$\leq 3.5\%$	$\leq 5\%$	$\leq 5\%$																									
X5R	* $\leq 5\%$	* $\leq 7\%$	* $\leq 7\%$	* $\leq 10\%$	* $\leq 10\%$																									
Y5V	$\leq 5\%$ * $\leq 9\%$	$\leq 7\%$ * $\leq 9\%$	$\leq 9\%$ * $\leq 12.5\%$	$\leq 12.5\%$ * $\leq 15\%$	$\leq 15\%$																									
13	Humidity Steady State	Appearance	No marking defects		- Temperature : $40\pm 2^{\circ}\text{C}$ - Humidity : 90~95% - Hour : $500\pm 12\text{hours}$ - Measurement after test Take it out and set it for $24\pm 2\text{ hours}$ (temperature compensating type) or $48\pm 4\text{ hours}$(high dielectric constant type) at room temperature, then measure.																									
		Capacitance Change	Within $\pm 5\%$ or $\pm 0.5\text{pF}$ (whichever is larger)	X7R, X5R : Within $\pm 12.5\%$ Y5V : Within $\pm 30\%$																										
		Dissipation (or Q)	30pF Min. : Q ≥ 350 (DF $\leq 0.3\%$) 10pF $\leq C_p \leq 30\text{pF}$: Q $\geq 275 + 5/2C$ (DF $\leq 1/(275 + 5/2C)$) 10pF Max. : Q $\geq 200 + 10C$ (DF $\leq 1/(200 + 10C)$)	<table><tr><th>Char.</th><th>50V Min.</th><th>25V</th><th>16V</th><th>10V</th><th>6.3V</th></tr><tr><td>X7R</td><td>$\leq 5\%$</td><td>$\leq 5\%$</td><td>$\leq 5\%$</td><td>$\leq 7.5\%$</td><td>$\leq 7.5\%$</td></tr><tr><td>X5R</td><td>* $\leq 7.5\%$</td><td>* $\leq 10\%$</td><td>* $\leq 10\%$</td><td>* $\leq 12.5\%$</td><td>* $\leq 12.5\%$</td></tr><tr><td>Y5V</td><td>$\leq 7.5\%$ * $\leq 12.5\%$</td><td>$\leq 10\%$ * $\leq 12.5\%$</td><td>$\leq 12.5\%$ * $\leq 15\%$</td><td>$\leq 15\%$ * $\leq 20\%$</td><td>$\leq 20\%$</td></tr></table>		Char.	50V Min.	25V	16V	10V	6.3V	X7R	$\leq 5\%$	$\leq 5\%$	$\leq 5\%$	$\leq 7.5\%$	$\leq 7.5\%$	X5R	* $\leq 7.5\%$	* $\leq 10\%$	* $\leq 10\%$	* $\leq 12.5\%$	* $\leq 12.5\%$	Y5V	$\leq 7.5\%$ * $\leq 12.5\%$	$\leq 10\%$ * $\leq 12.5\%$	$\leq 12.5\%$ * $\leq 15\%$	$\leq 15\%$ * $\leq 20\%$	$\leq 20\%$	
		Char.	50V Min.	25V		16V	10V	6.3V																						
X7R	$\leq 5\%$	$\leq 5\%$	$\leq 5\%$	$\leq 7.5\%$	$\leq 7.5\%$																									
X5R	* $\leq 7.5\%$	* $\leq 10\%$	* $\leq 10\%$	* $\leq 12.5\%$	* $\leq 12.5\%$																									
Y5V	$\leq 7.5\%$ * $\leq 12.5\%$	$\leq 10\%$ * $\leq 12.5\%$	$\leq 12.5\%$ * $\leq 15\%$	$\leq 15\%$ * $\leq 20\%$	$\leq 20\%$																									
I.R	More than 1,000M Ω or 50 Ω .F (Whichever is Smaller)																													

No.	Item		Characteristic				Test Methods and Conditions														
			Temperature Compensating Type		High Dielectric Constant Type																
14	Capacitance Temperature Characteristics	Capacitance Change	<table><thead><tr><th>Char.</th><th>Temp. Range</th><th>Reference Temp.</th><th>Cap. Change</th></tr></thead><tbody><tr><td>X7R</td><td>-55 to +125℃</td><td rowspan="3">25℃</td><td>Within ±15%</td></tr><tr><td>X5R</td><td>-55 to +85℃</td><td>Within ±15%</td></tr><tr><td>Y5V</td><td>-30 to +85℃</td><td>Within 22% -82%</td></tr></tbody></table>				Char.	Temp. Range	Reference Temp.	Cap. Change	X7R	-55 to +125℃	25℃	Within ±15%	X5R	-55 to +85℃	Within ±15%	Y5V	-30 to +85℃	Within 22% -82%	(1) Temperature Compensating Type: The temperature coefficient is determined using the capacitance measured in step 3 as a reference. When cycling the temperature sequentially from step 1 through 5 (C0G: +25 to 125℃) the capacitance shall be within the specified tolerance for the temperature coefficient. The capacitance drift is calculated by dividing the difference between the maximum measured values in the step 1, 3 and 5 by the Cap. value in step 3
		Char.	Temp. Range	Reference Temp.	Cap. Change																
X7R	-55 to +125℃	25℃	Within ±15%																		
X5R	-55 to +85℃		Within ±15%																		
Y5V	-30 to +85℃		Within 22% -82%																		
Temperature Coefficient	<table><thead><tr><th>Char.</th><th>Temp. Range</th><th>Temperature Coefficient</th></tr></thead><tbody><tr><td>C0G</td><td>-55 to +125℃</td><td>±30ppm/℃</td></tr></tbody></table>	Char.	Temp. Range	Temperature Coefficient	C0G	-55 to +125℃	±30ppm/℃	<table><thead><tr><th>Step</th><th>Temperature(℃)</th></tr></thead><tbody><tr><td>1</td><td>25±2</td></tr><tr><td>2</td><td>-55±3</td></tr><tr><td>3</td><td>25±2</td></tr><tr><td>4</td><td>125±3(for C0G)</td></tr><tr><td>5</td><td>25±2</td></tr></tbody></table> (2) High Dielectric Constant Type : The ranges of capacitance change compared with the 25℃ value over the temperature range shown in the table shall be in the specified range.	Step	Temperature(℃)	1	25±2	2	-55±3	3	25±2	4	125±3(for C0G)	5	25±2	
Char.	Temp. Range	Temperature Coefficient																			
C0G	-55 to +125℃	±30ppm/℃																			
Step	Temperature(℃)																				
1	25±2																				
2	-55±3																				
3	25±2																				
4	125±3(for C0G)																				
5	25±2																				
15	Preservation(keeping)		※ When solderability is considered, capacitors are recommended to be used in 12 months				(1) Temperature : 25℃ ±10℃ (2) Relative Humidity : Below 70% RH														
16	The regulation of environmental pollution materials.		※ Never use materials mentioned below in MLCC products regulated this document. Pb, Cd, Hg, Cr+6, PBB(polybromide biphenyl), PBDE(polybrominated diphenyl ethers), asbestos.																		

- In case of high Voltage and thin layer type Capacitor, it can be different from nominal specification.

So Please ask to our sales person.

Radial & Axial

Features

This widely used ceramic capacitors includes both monolithic and multilayer types to provide a wide capacitance range of 1pF through 1 μ F in respectively one standard size and shape(Radial & Axial).

Applications


The class1 temperature compensating(C0G) products can be used in circuits to stabilize frequency and temperature characteristics.

The X7R, Z5U, Y5V dielectrics are optimum for by pass capacitors.

Shape and Dimensions

Bulk Type


Radial Type

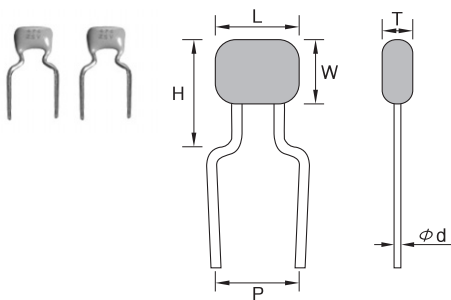


CODE	L Max.	W Max.	T Max.	H Max.	P ±0.7	Ød	Color	Marking
051B	5.5	5.5	3.2	6.4	5	0.5	Orange or Gold	Ex) 104
077B	7.7	7.6		9.2				

Flat Type

Radial Type

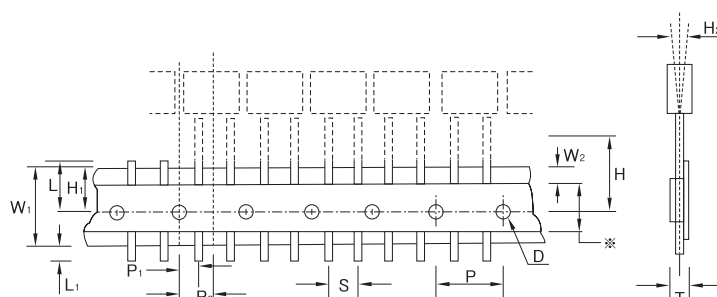

Axial Type

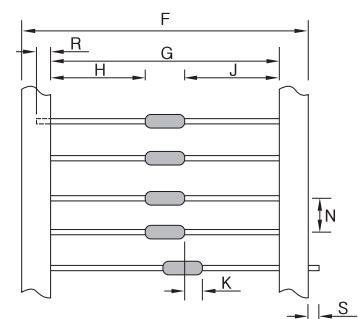

Code	Dimensions	Tolerance	Code	Dimensions	Tolerance
D(Ø)	4	±0.3	P1	3.85	±0.7
H	16	±0.5	P2	6.35	±1.3
H1	9	+0.76, -0.5	T	0.9	Max.
H2	0	±2	W1	18	±0.5
L	11	Max.	W2	0	+0.6 Max.
L1	1.5	Max.	S	5	±0.7
P	12.7	±0.3	*	No adhesive may be exposed	

Code	Dimensions	Tolerance
F	64.8	-0, +2
G	50.8~53.3	
H	=J	±1.2
J	=H	±1.2
K	0.8	Max.
N	5	±0.4
R	3.2	Min.

How to Order (Product Identification)

CA 2633 Y5V 104 Z 500 F

1

2

3

4

5

6

7

1 Type

CR : Radial Lead Type

CA : Axial Lead Type

2 Dimension Code

The number shows the maximum length of "L" by 1/10 in millimeter, and the alphabet means lead difference. (Refer to above diagram)

3 Temperature Coefficient Code

Temperature Characteristic	Temperature Range	Capacitance Change or Temperature Coefficient
C0G	-55 to 125°C	0±30ppm/°C
X7R	-55 to 125°C	±15%
Z5U	10°C to 85°C	+22, -56%
Y5V	-30 to 85°C	+22, -82%

4 Capacitance Code (Pico Farads)

First two digits are significant; third digit denotes number of zeros.

Ex.) 101 = 100pF, 1R5 = 1.5pF, 103 = 10,000pF

5 Capacitance Tolerance Code

Code	Tolerance	Remark
J	$\pm 5.0\%$	C0G
K	$\pm 10\%$	X7R, C0G
M	$\pm 20\%$	Z5U, X7R
Z	+80, -20%	Z5U, Y5V

6 Rated Voltage Code

Code	250	500	101
Volt	DC 25V	DC 50V	DC 100V

7 Packing Code

Code	B	R	F
Packing	Bulk	Reel Pack	Flat Pack

Reliability and Test Conditions

No.	Item	Characteristic					Test Methods and Conditions																													
		Temperature Compensating Type	High Dielectric Constant Type																																	
1.	Operating Temperature Range	C0G : -55 to +125℃	X7R : -55 to +125℃ Z5U : +10 to +85℃ Y5V : -30 to 85℃																																	
2.	Insulation Resistance	More than 10,000MΩ or 500Ω.F (whichever is smaller)					Applied the rated voltage for 2 minute																													
3.	Dielectric Strength	No detects or abnormalities					- C0G : The rated voltage×300% - X7R, Z5U, Y5V : " ×250%																													
4.	Capacitance	Within the specified tolerance					Temperature Compensating Type																													
5.	Dissipation Factor	30pF Min. : Q≥1,000(DF≤0.1%) 30pF Max. : Q≥400+20C (DF≤1/(400+20C))	<table><tr><th>Char.</th><th>50V Min.</th><th>25V</th><th>16V</th><th>10V</th></tr><tr><td>X7R</td><td>≤2.5%</td><td>≤3%</td><td>≤3.5%</td><td>≤5.0%</td></tr><tr><td>Z%V</td><td>≤4.0%</td><td>—</td><td>—</td><td>—</td></tr><tr><td>Y5V</td><td>≤5% (<220nF) ≤7% (≥220nF)</td><td>≤7%</td><td>≤9% (<220nF) ≤12.5% (≥220nF)</td><td>≤12.5%</td></tr></table>	Char.	50V Min.	25V	16V	10V	X7R	≤2.5%	≤3%	≤3.5%	≤5.0%	Z%V	≤4.0%	—	—	—	Y5V	≤5% (<220nF) ≤7% (≥220nF)	≤7%	≤9% (<220nF) ≤12.5% (≥220nF)	≤12.5%	<table><tr><th>Cap.</th><th>Testing Frequency</th><th>Testing Voltage</th></tr><tr><td>C0G (C≤1000pF)</td><td>1±0.1MHz</td><td>0.5 to 5V rms</td></tr><tr><td>C0G (C>1000pF)</td><td>1±0.1kHz</td><td>1±0.2V rms</td></tr><tr><td>X7R, Z5U, Y5V (C≤10μF 10V Min.)</td><td>1±0.1kHz</td><td>1±0.2V rms</td></tr></table>	Cap.	Testing Frequency	Testing Voltage	C0G (C≤1000pF)	1±0.1MHz	0.5 to 5V rms	C0G (C>1000pF)	1±0.1kHz	1±0.2V rms	X7R, Z5U, Y5V (C≤10μF 10V Min.)	1±0.1kHz	1±0.2V rms
Char.	50V Min.	25V	16V	10V																																
X7R	≤2.5%	≤3%	≤3.5%	≤5.0%																																
Z%V	≤4.0%	—	—	—																																
Y5V	≤5% (<220nF) ≤7% (≥220nF)	≤7%	≤9% (<220nF) ≤12.5% (≥220nF)	≤12.5%																																
Cap.	Testing Frequency	Testing Voltage																																		
C0G (C≤1000pF)	1±0.1MHz	0.5 to 5V rms																																		
C0G (C>1000pF)	1±0.1kHz	1±0.2V rms																																		
X7R, Z5U, Y5V (C≤10μF 10V Min.)	1±0.1kHz	1±0.2V rms																																		
6.	Terminal Strength	No evidence of damage to body of device of looseness of terminals.					A static load of 10N(1kgf) : applied to one terminal in the axial direction and acting in a direction away from the body for 1 to 5 secs.																													

No.	Item		Characteristic					Test Methods and Conditions																	
			Temperature Compensating Type	High Dielectric Constant Type																					
7.	Resistance to Soldering Heat	Appearance	No marked defect							- Soldering Temp : $260\pm5^{\circ}\text{C}$ - Immersion Time : $5\pm0.5\text{sec}$ - Take it out and set it for 24 ± 2 hours(temperature compensating type)or 48 ± 4hours(high dielectric constant type) then measure.															
		Capacitance Change	Within $\pm2.5\%$ or $\pm0.25\text{pF}$ (whichever is larger)	X7R : $\leq \pm 7.5\%$ Z5U, Y5V : $\leq \pm 20\%$																					
		Dissipation Factor(or Q)	30pF Min. : $Q\geq1,000$ ($\text{DF}\leq0.1\%$) 30pF Max. : $Q\geq400+20\text{C}$ ($\text{DF}\leq1/(400+20\text{C})$)	<table><tr><th>Char.</th><th>50V Min.</th><th>25V</th><th>16V</th><th>10V</th></tr><tr><td>X7R</td><td>$\leq 2.5\%$</td><td>$\leq3\%$</td><td>$\leq3.5\%$</td><td>$\leq5.0\%$</td></tr><tr><td>Z5U</td><td>$\leq4.0\%$</td><td>—</td><td>—</td><td>—</td></tr><tr><td>Y5V</td><td>$\leq5\%$ ($<220\text{nF}$) $\leq7\%$ ($\geq220\text{nF}$)</td><td>$\leq7\%$</td><td>$\leq9\%$ ($<220\text{nF}$) $\leq12.5\%$ ($\geq220\text{nF}$)</td><td>$\leq12.5\%$</td></tr></table>	Char.	50V Min.	25V	16V	10V		X7R	$\leq 2.5\%$	$\leq3\%$	$\leq3.5\%$	$\leq5.0\%$	Z5U	$\leq4.0\%$	—	—	—	Y5V	$\leq5\%$ ($<220\text{nF}$) $\leq7\%$ ($\geq220\text{nF}$)	$\leq7\%$	$\leq9\%$ ($<220\text{nF}$) $\leq12.5\%$ ($\geq220\text{nF}$)	$\leq12.5\%$
		Char.	50V Min.	25V	16V	10V																			
X7R	$\leq 2.5\%$	$\leq3\%$	$\leq3.5\%$	$\leq5.0\%$																					
Z5U	$\leq4.0\%$	—	—	—																					
Y5V	$\leq5\%$ ($<220\text{nF}$) $\leq7\%$ ($\geq220\text{nF}$)	$\leq7\%$	$\leq9\%$ ($<220\text{nF}$) $\leq12.5\%$ ($\geq220\text{nF}$)	$\leq12.5\%$																					
I.R.	More than $10,000\text{M}\Omega$ or $500\Omega\cdot\text{F}$ (whichever & smaller)																								
8.	Temperature Cycle	Appearance	No marking defects							<table><tr><th>Step</th><th>1</th><th>2</th><th>3</th><th>4</th></tr><tr><td>Min. Operating Temp. $+0, -3$</td><td>Room Temp.</td><td>Max. Operating Temp. $+3, -0$</td><td>Room Temp.</td></tr><tr><td>Time (min)</td><td>30 ± 3</td><td>2 to 3</td><td>30 ± 3</td><td>2 to 3</td></tr></table> Take it out and set it for 24 ± 2 hours [tempeature compensating or 48 ± 4 hours(high dielectric Type) at room temperature, than measure.	Step	1	2	3	4	Min. Operating Temp. $+0, -3$	Room Temp.	Max. Operating Temp. $+3, -0$	Room Temp.	Time (min)	30 ± 3	2 to 3	30 ± 3	2 to 3	
		Step	1	2	3	4																			
		Min. Operating Temp. $+0, -3$	Room Temp.	Max. Operating Temp. $+3, -0$	Room Temp.																				
		Time (min)	30 ± 3	2 to 3	30 ± 3	2 to 3																			
Capacitance Change	Within $\pm2.5\%$ or $\pm0.25\text{pF}$	X7R : Within $\pm 7.5\%$ Z5U, Y5V : Within $\pm 20\%$																							
Dissipation Factor(or Q)	30pF Min. : $Q\geq1,000$ ($\text{DF}\leq0.1\%$) 30pF Max. : $Q\geq400+20\text{C}$ ($\text{DF}\leq1/(400+20\text{C})$)	<table><tr><th>Char.</th><th>50V Min.</th><th>25V</th><th>16V</th><th>10V</th></tr><tr><td>X7R</td><td>$\leq 2.5\%$</td><td>$\leq3\%$</td><td>$\leq3.5\%$</td><td>$\leq5.0\%$</td></tr><tr><td>Z5U</td><td>$\leq4.0\%$</td><td>—</td><td>—</td><td>—</td></tr><tr><td>Y5V</td><td>$\leq5\%$ ($<220\text{nF}$) $\leq7\%$ ($\geq220\text{nF}$)</td><td>$\leq7\%$</td><td>$\leq9\%$ ($<220\text{nF}$) $\leq12.5\%$ ($\geq220\text{nF}$)</td><td>$\leq12.5\%$</td></tr></table>	Char.	50V Min.	25V	16V	10V	X7R	$\leq 2.5\%$	$\leq3\%$	$\leq3.5\%$	$\leq5.0\%$	Z5U	$\leq4.0\%$	—	—	—	Y5V	$\leq5\%$ ($<220\text{nF}$) $\leq7\%$ ($\geq220\text{nF}$)	$\leq7\%$	$\leq9\%$ ($<220\text{nF}$) $\leq12.5\%$ ($\geq220\text{nF}$)	$\leq12.5\%$			
Char.	50V Min.	25V	16V	10V																					
X7R	$\leq 2.5\%$	$\leq3\%$	$\leq3.5\%$	$\leq5.0\%$																					
Z5U	$\leq4.0\%$	—	—	—																					
Y5V	$\leq5\%$ ($<220\text{nF}$) $\leq7\%$ ($\geq220\text{nF}$)	$\leq7\%$	$\leq9\%$ ($<220\text{nF}$) $\leq12.5\%$ ($\geq220\text{nF}$)	$\leq12.5\%$																					
I.R.	More than $10,000\text{M}\Omega$ or $500\Omega\cdot\text{F}$ (Whichever is smaller)																								
9.	Humidity Load	Appearance	No marking defects							- Temperature : $40\pm2^{\circ}\text{C}$ - Humidity : $90\sim95\%\text{RH}$ - Hour : $500\pm12\text{hrs}$ - Test Voltage : Tge rated voltage - Take it out and set it for 24 ± 2 hours (temperature compensatig) or 48 ± 4 hours(high dielectric constant type) at room temperature, then measure. The charge/discharge current is less than 50mA.															
		Capacitance Change	Within $\pm7.5\%$ or $\pm0.75\text{pF}$ (whichever is larger)	X7R : Within $\pm12.5\%$ Z5U : Within $\pm30\%$ Y5V : Within $+30\%, -40\%$ ($\text{Y5V}/1.0\mu\text{F}, 2.2\mu\text{F}, 4.7\mu\text{F}/10\text{V}$) Within $\pm30\%$ (others)																					
		Dissipation Factor(or Q)	30pF Min. : $Q\geq200$ ($\text{DF}\leq0.5\%$) 30pF Max. : $Q\geq100+10/3\text{C}$ ($\text{DF}\leq1/(100+10/3\text{C})$)	<table><tr><th>Char.</th><th>50V Min.</th><th>25V</th><th>16V</th><th>10V</th></tr><tr><td>X7R</td><td>$\leq5\%$</td><td>$\leq5\%$</td><td>$\leq5\%$</td><td>$\leq5\%$</td></tr><tr><td>Z5U</td><td>$\leq4.0\%$</td><td>—</td><td>—</td><td>—</td></tr><tr><td>Y5V</td><td>$\leq7.5\%$</td><td>$\leq10\%$ ($<1\mu\text{F}$) $\leq12.5\%$ ($\geq1\mu\text{F}$)</td><td>$\leq12.5\%$</td><td>$\leq15\%$</td></tr></table>	Char.	50V Min.	25V	16V	10V		X7R	$\leq5\%$	$\leq5\%$	$\leq5\%$	$\leq5\%$	Z5U	$\leq4.0\%$	—	—	—	Y5V	$\leq7.5\%$	$\leq10\%$ ($<1\mu\text{F}$) $\leq12.5\%$ ($\geq1\mu\text{F}$)	$\leq12.5\%$	$\leq15\%$
		Char.	50V Min.	25V	16V	10V																			
X7R	$\leq5\%$	$\leq5\%$	$\leq5\%$	$\leq5\%$																					
Z5U	$\leq4.0\%$	—	—	—																					
Y5V	$\leq7.5\%$	$\leq10\%$ ($<1\mu\text{F}$) $\leq12.5\%$ ($\geq1\mu\text{F}$)	$\leq12.5\%$	$\leq15\%$																					
I.R.	More than $500\text{M}\Omega$ or $25\Omega\cdot\text{F}$ (whichever is smaller)																								
10.	High Temperature Load	Appearance	No marked defect							- Testing Time : $1000\pm12\text{hrs}$ - Applied Voltage : Rated Voltage $\times 200\%$ - Temperature : C0G, X7R $\rightarrow 125\pm3^{\circ}\text{C}$ Z5U, Y5V $\rightarrow 85\pm3^{\circ}\text{C}$															
		Capacitance change	Within $\pm3\%$ or $\pm0.3\text{pF}$ (whichever is larger)	X7R : Within $\pm12.5\%$, Z5U : Within $\pm30\%$ Y5V : Within $\pm30\%$ (Cap. $<1.0\mu\text{F}$) Within $+30\%, -40\%$ (Cap. $\geq1.0\mu\text{F}$)																					

No.	Item		Characteristic					Test Methods and Conditions																											
			Temperature Compensating Type		High Dielectric Constant Type																														
10	High Temperature Load	Dissipation Factor(or Q)	30pF Min. : Q≥350 (DF≤0.3%) 10pF ≤ Cp≤30pF: Q≥275+5/2C (DF≤1/(275+5/2C)) 10pF Max. : Q≥200+10C (DF≤1/(200+10C))		<table><tr><th>Char.</th><th>50V Min.</th><th>25V</th><th>16V</th><th>10V</th></tr><tr><td>X7R</td><td>≤5%</td><td>≤5%</td><td>≤5%</td><td>≤5%</td></tr><tr><td>Z5U</td><td>≤4.0%</td><td>—</td><td>—</td><td>—</td></tr><tr><td>Y5V</td><td>≤7.5%</td><td>≤10% (<1μF) ≤7% (≥1μF)</td><td>≤12.5%</td><td>≤15%</td></tr></table>				Char.	50V Min.	25V	16V	10V	X7R	≤5%	≤5%	≤5%	≤5%	Z5U	≤4.0%	—	—	—	Y5V	≤7.5%	≤10% (<1μF) ≤7% (≥1μF)	≤12.5%	≤15%	Take it out and set it for 24±2 hours (temperature compensatig) or 48±4 hours(high dielectric constant type) at room temperature, then measure. The charge/discharge current is less than 50mA.						
		Char.	50V Min.	25V	16V	10V																													
X7R	≤5%	≤5%	≤5%	≤5%																															
Z5U	≤4.0%	—	—	—																															
Y5V	≤7.5%	≤10% (<1μF) ≤7% (≥1μF)	≤12.5%	≤15%																															
I.R.	More than 1000MΩ or 50ΩF (Whichever is smaller)																																		
11	Capacitance Temperature Characteristics	Capacitance Change			<table><tr><th>Char.</th><th>Temp. Range</th><th>Reference Temp.</th><th>Cap. Change</th></tr><tr><td>X7R</td><td>−55 to +125℃</td><td rowspan="3">25℃</td><td>Within ±15%</td></tr><tr><td>Z5U</td><td>−10 to +85℃</td><td>Within +22% −56%</td></tr><tr><td>Y5V</td><td>−30 to +85℃</td><td>Within +22% −82%</td></tr></table>				Char.	Temp. Range	Reference Temp.	Cap. Change	X7R	−55 to +125℃	25℃	Within ±15%	Z5U	−10 to +85℃	Within +22% −56%	Y5V	−30 to +85℃	Within +22% −82%	(1) Temperature Compensating Type : The temperature coefficient is determined using the capacitance measured in step 3 as a reference. When cycling the temperature sequentially from step 1 through 5. (SL: +25 to 85℃) the capacitance shall be with in the specified tolerance for the temperature coefficient. The capacitance drift is calculated dividing the difference between the maximum measured values in the step 1, 3 and 5 by Cap, value in step 3. <table><tr><th>Step</th><th>Temperature(℃)</th></tr><tr><td>1</td><td>25±2</td></tr><tr><td>2</td><td>-55±3</td></tr><tr><td>3</td><td>25±2</td></tr><tr><td>4</td><td>125±3(for C0G)</td></tr><tr><td>5</td><td>25±2</td></tr></table> (2) High Dielectric Constant Type : The ranges of capacitance change compared with the 25℃ value over the temperature range shown in the table shall be in the specified range.	Step	Temperature(℃)	1	25±2	2	-55±3	3	25±2	4	125±3(for C0G)	5	25±2
		Char.	Temp. Range	Reference Temp.	Cap. Change																														
X7R	−55 to +125℃	25℃	Within ±15%																																
Z5U	−10 to +85℃		Within +22% −56%																																
Y5V	−30 to +85℃		Within +22% −82%																																
Step	Temperature(℃)																																		
1	25±2																																		
2	-55±3																																		
3	25±2																																		
4	125±3(for C0G)																																		
5	25±2																																		
Temperature Coefficient	<table><tr><th>Char.</th><th>Temp. Range</th><th>Temperature Coefficient</th></tr><tr><td>C0G</td><td>−55 to +125℃</td><td>±30ppm/℃</td></tr></table>	Char.	Temp. Range	Temperature Coefficient	C0G	−55 to +125℃	±30ppm/℃																												
Char.	Temp. Range	Temperature Coefficient																																	
C0G	−55 to +125℃	±30ppm/℃																																	
12	The regulation of environmental pollution materials		※Never use materials mentioned below in leaded MLCC products regulated this document. Pb, Cd, Hg, Cr ⁺⁶ , PBB(polybromida biphenyl), PBDE(polybrominated diphenyl ethers), asbestos.																																
13	The regulation about destructive materials of the ozone layer		Never use the ODS(ozone depleting substance) materials below in leaded MLCC products regulated this document.																																

Packing Quantity

Unit : pcs

Radial Type			Axial Type		
Inner Box	Outer Box	Remark	Inner Box	Outer Box	Remark
2,500	15,000	Packing set on the basis of flat tapping	5,000	50,000	Packing set on the basis of flat tapping

Capacitance Range

Type Char. Cap(pF) \ Volt	Radial				
	C0G		X7R		Z5U
	50	100	50	100	50
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
12					
15					
16					
18					
20					
22					
24					
27					
30					
33					
36					
39					
43					
47					
51					
56					
62					
68					
75					
82					
91					
100					
120					
150					
180					
220					
270					
330					
390					
470					
560					
680					
820					
1.000					
1.200					
1.500					
1.800					
2.200					
2.700					
3.300					
3.900					
4.700					
5.600					
6.800					
8.200					
10.000					
15.000					
22.000					
33.000					
47.000					
68.000					
100.000					
150.000					
220.000					
330.000					
470.000					
680.000					
1.000.000					

[illegible]